


COMMERCIAL
CONTROL
VALVES

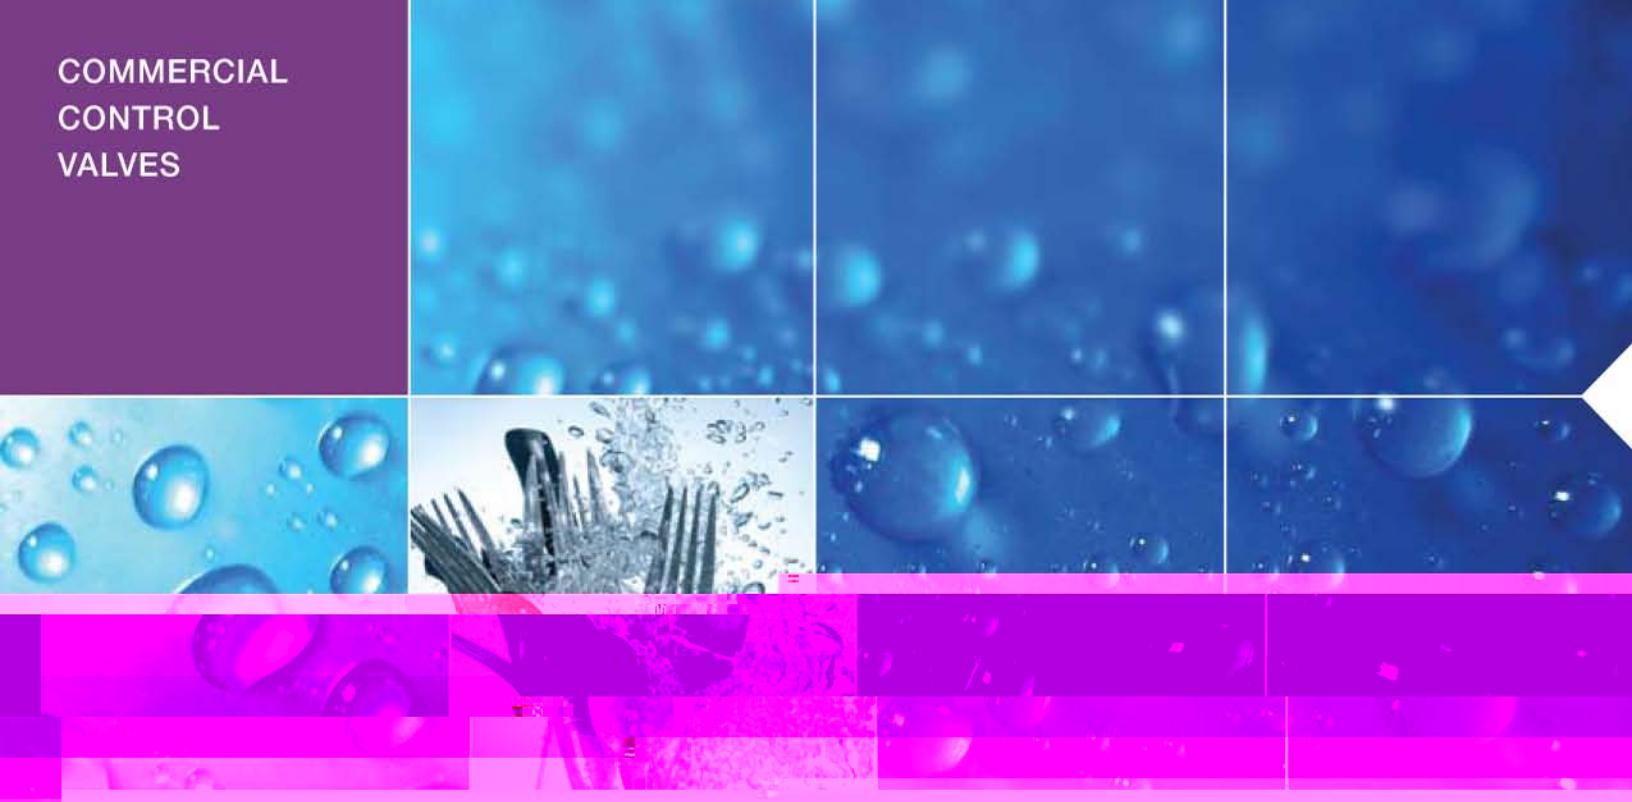

Performa™ Cv Control Valves

Pentair Water™ offers a full range of Autotrol™ Control Valves to meet a wide range of water conditioning applications.

Logix™ Series

742 Timed Logic



742 Series

2 Dimensional

764 Dimensional



Specifications

Electrical

Controller Operating Voltage	12 Volt – AC (Requires use of Pentair Water®-supplied transformer)
Input Supply Frequency	50 or 60 Hz (Controller configuration dependent)
Motor Input Voltage	12 Volt – AC
Controller System Power Consumption	3 W

Copyright © 2010 Pearson Education, Inc.

www.Baidu.com

第10章

"will the audience care?" question

“Wenige Minuten später war ich

<http://www.ams.org/mathweb/amslinks> - <http://www.ams.org/mathweb/amslinks>

<http://www.times-union.com/weather>


WuXi Biotech Home Page www.wuxibiotech.com



www.ijerpi.org


Digitized by srujanika@gmail.com

13

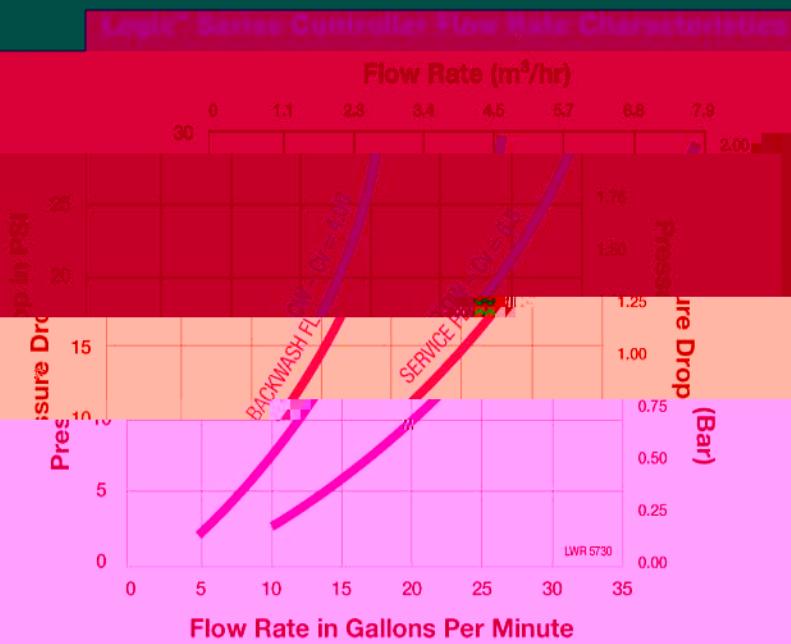


Injector* Performance Logix™ Series Controllers

Injector "H" (Light Purple)
For 9-inch Tanks

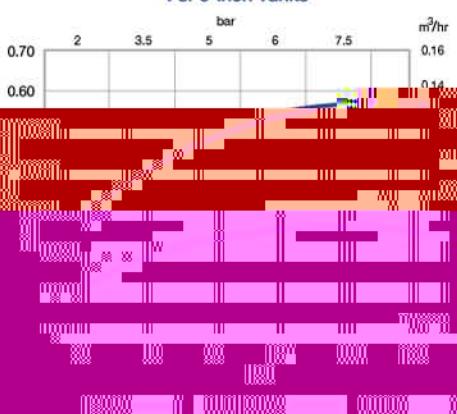


Injector "J" (Light Blue)
For 10-inch Tanks

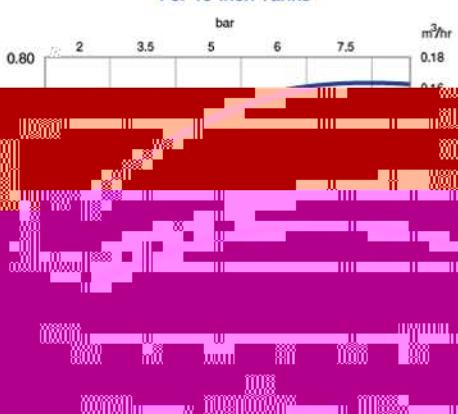


Injector "K" (Dark Red)




Injector "L" (Dark Green)

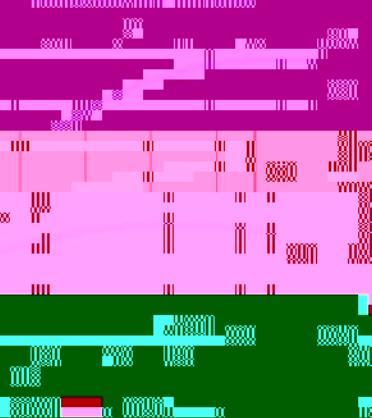

Injector "M" (Dark Blue)

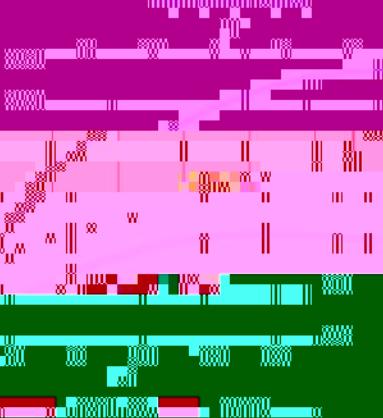

Injector "N" (Red)

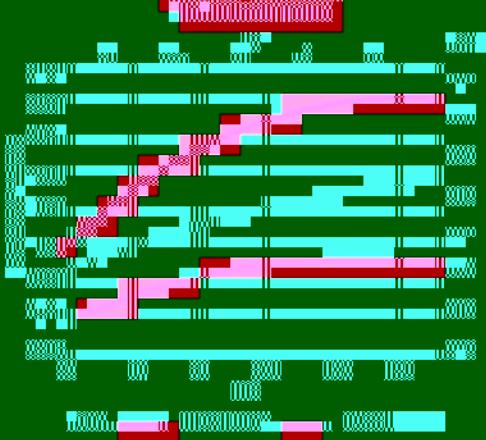

Injector "O" (Orange)

